



ADACOM QUALIFIED SERVICES

**Instructions for ADACOM Timestamp
using Acrobat Reader DC**


To configure a timestamp server, you need the server name and the URL.

Server Name: ADACOM TSA


Server URL: <https://tss.adacom.com/qtss>


Open Acrobat Reader DC.

- 1) Open the **Preferences** dialog box
- 2) Under **Categories**, select **Signatures**
- 3) For **Document Timestamping**, click **More**

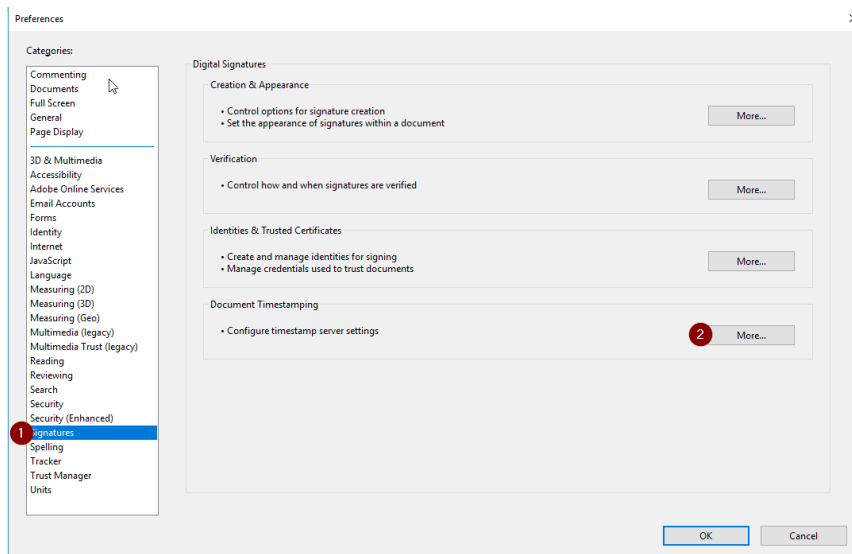


- 4) Select **Time Stamp Servers** on the left.

- 5) Click the **New** button . Type a name, and then type the server URL and then click **OK**.

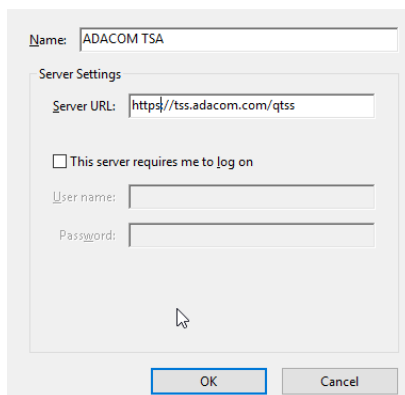

Set a timestamp server as the default.

Open Acrobat Reader DC.

- 1) Open the **Preferences** dialog box
- 2) Under **Categories**, select **Signatures**
- 3) For **Document Timestamping**, click **More**
- 4) Select **Time Stamp Servers** on the left.
- 5) Select the timestamp server, and click the **Set Default** button 
- 6) Click **OK** to confirm your selection.

